BAS-MOBILIAR

Endesa A2


ENA2

D-400





ENA1

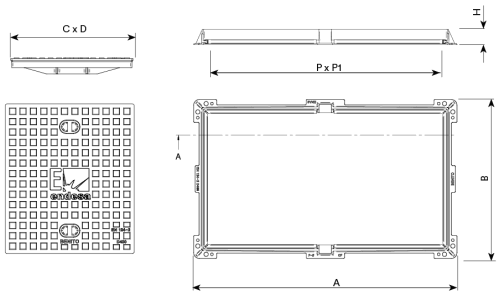

REF.		A	B	H	C	D	P	P1	UN.
ENA2	D400	1365	825	80	620	720	1220	680	10

Endesa A2 is designed to withstand medium traffic. Perfect for installation on roads with an AADT of 1,000-20,000, especially roadways (including pedestrian streets), stabilized shoulders, and parking areas for all types of vehicles.

- Made of ductile iron, in spheroidal graphite, according to ISO 1083 (Type 500-7) and EN 1563 standard.
- Complies with European standard UNE EN-124.
- Approved by the company ENDESA (ENEL Group)
- Includes removable central reinforcement.
- Slit to facilitate opening.
- Non-slip metal surface.
- Coated with black, non-toxic, non-flammable and non-polluting paint
- Noise-reducing seal on the frames

V. 2026-06-01 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

+49 (0) 521 450 131-2 | mb@bas-mobiliar.de