BAS-MOBILIAR

Canal

RC50

D-400

Designed to withstand medium traffic. Perfect for installation on roads with an ADT of 1,000-20,000, and in particular on road carriageways (including pedestrian streets), stabilised kerbstones and parking areas for all types of vehicles.

Complies with European standard EN-1433.
Metal non-slip surface.
Coated with non-toxic, non-flammable and environmentally safe black paint.
Optional : Fixing system between the channel and the grate.

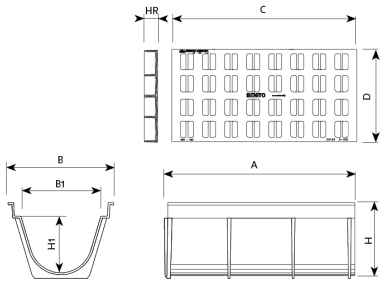

REF.		A	B	B1	H	H1	C	D	dm2	UN.
RC50	D400	980	550	415	395	300	980	490	16	10

IMPORTANT:
It is imperative to level the channels during their installation and Base like the side walls, a defective installation cancels all guarantee.

V. 2024-04-17 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.