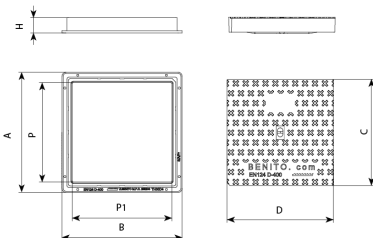

TH80D4

TH40D4


Hidráulica D4 is designed to support medium traffic. It is perfect for installing on roads with an ADT of 1.000-20.000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Compliant with the European standard UNE EN-124.
- One end is inserted to guarantee perfect placement.
- Groove to facilitate the opening process.
- Frame fitted with holes for fastening to the ground.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.
- Optional: security screw closure

REF.	A	B	H	C	D	P	P1	UN.
TH100D4	995	995	80	895	895	870	870	
TH120D4	1200	1200	75	1135	1135	1100	1100	