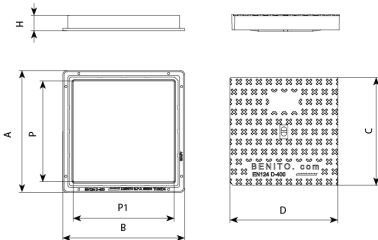



**TH80D4**


Hidráulica D4 is designed to support medium traffic. It is perfect for installing on roads with an ADT of 1.000-20.000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Compliant with the European standard UNE EN-124.
- One end is inserted to guarantee perfect placement.
- Groove to facilitate the opening process.
- Frame fitted with holes for fastening to the ground.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.
- Optional: security screw closure

REF.	A	B	H	C	D	P	P1	UN.
TH40D4	410	410	75	345	345	305	305	40
TH50D4	505	505	75	440	440	405	405	40
TH60D4	610	610	75	540	540	505	505	20
TH70D4	705	705	75	640	640	605	605	-
TH90D4	890	890	75	840	840	790	790	-