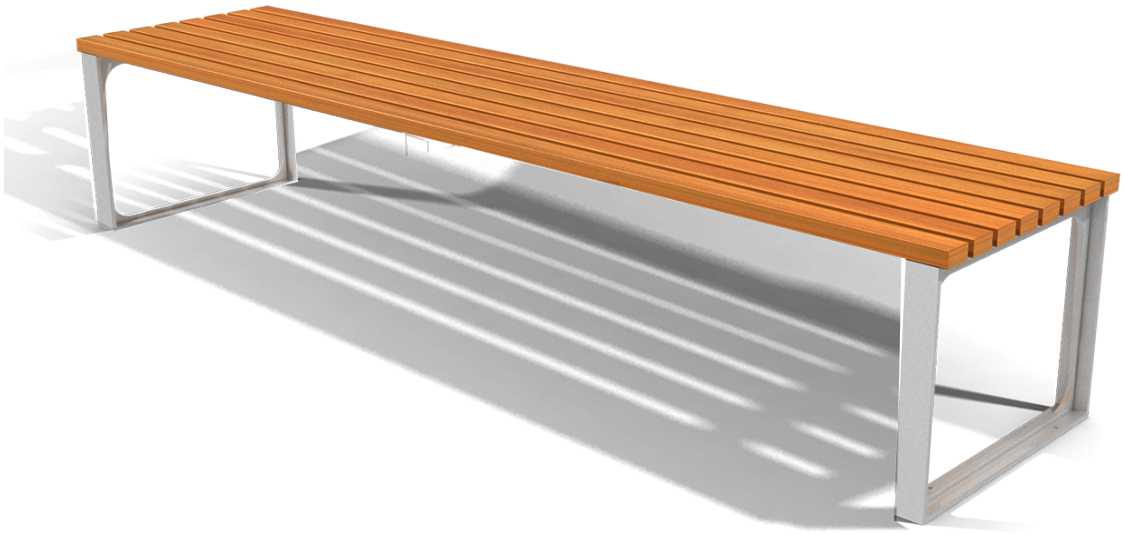


UM397BE

Bench

Leman

By Compagnies Desrues © ® BENITO

Grey Casting

Inclusive Product


Hard wood


ISO 9001 ISO 50001 ISO 14001 ISO 45001

Stool made with ductile iron legs, with Ferrus treatment, an iron protection process that guarantees optimal corrosion resistance.

Ductile Iron treated with FERRUS: iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint.Forged black colour

Hardwood treated with LIGNUS: Wood from responsible forestry. Density greater than 930kg/m³, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.





Ref.	A	B	H	H1
UM397E	1965	600	830	430
UM397BE	1965	545	460	-
UM397SE	565	600	830	430

Leman
UM397SE



Leman
UM397E



+49 (0) 521 450 131-2 | mb@bas-mobiliar.de

V. 2026-05-20 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.

V. 2026-05-20 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.